

03/31/00



JC780 U.S. PTO

4-3-00

A

Please type a plus sign (+) inside this box → ☐PTO/SB/05 (4/98)
Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. 678-430 (P8851)

First Inventor or Application Identifier Jae-Min Kim

Title Portable Composite Communication....

Express Mail Label No. EL393560799US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:Assistant Commissioner for Patents
Box Patent Application
Washington, DC 202311. ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)2. ☒ Specification [Total Pages 34] 1
(preferred arrangement set forth below)

- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure

3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 10] 1

4. Oath or Declaration [Total Pages 2] 1

- a. ☒ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting
inventor(s) named in the prior application,
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

*** NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY
FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT
IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).**5. ☐ Microfiche Computer Program (Appendix)6. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)

- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS7. ☒ Assignment Papers (cover sheet & document(s))8. ☐ 37 C.F.R. § 3.73(b) Statement of Power of Attorney
(when there is an assignee)9. ☐ English Translation Document (if applicable)10. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations11. ☐ Preliminary Amendment12. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)13. ☐ * Small Entity Statement filed in prior application,
Statement(s) Status still proper and desired
(PTO/SB/09-12)14. ☒ Certified Copy of Priority Document(s)
(if foreign priority is claimed)15. ☐ Other: _____

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. _____

Prior application information: Examiner _____ Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.**17. CORRESPONDENCE ADDRESS**☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

Name	Paul J. Farrell				
Address	Dilworth & Barrese 333 Earle Ovington Blvd.				
City	Uniondale	State	NY	Zip Code	11553
Country	U.S.	Telephone	(516) 228-8484	Fax	(516) 228-8516

Name (Print/Type)	Rocco S. Barrese	Registration No. (Attorney/Agent)	25,253
Signature		Date	March 31, 2000

PATENT

Atty. Docket No. 678-430 (P8851)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Assistant Commissioner
for Patents
Washington, D.C. 20231

UTILITY APPLICATION FEE TRANSMITTAL

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): Jae-Min KIM; Jeong-Seok OH; Sang-Ryul PARK

For: PORTABLE COMPOSITE COMMUNICATION TERMINAL FOR
TRANSMITTING/RECEIVING VOICE AND IMAGES, AND OPERATION
METHOD AND COMMUNICATION SYSTEM THEREOF

Enclosed are:

[X] 27 page(s) of specification

[X] 1 page(s) of Abstract

[X] 6 page(s) of claims

[X] 10 sheets of drawings [X] formal [] informal

[X] 2 page(s) of Declaration and Power of Attorney


[X] An Assignment of the invention to Samsung Electronics Co., Ltd.

CERTIFICATION UNDER 37 C.F.R. § 1.10

I hereby certify that this New Application Transmittal and the documents referred to as enclosed therein are being deposited with the United States Postal Service on this date March 31, 2000 in an envelope as "Express Mail Post Office to Addressee" Mail Label Number EL393560799US addressed to: Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Kevin C. Ecker

(Type or print name of person mailing paper)


(Signature of person mailing paper)

- ☐ This application claims the benefit under 35 U.S.C. §119(e) of U.S. Provisional Application(s) No(s).:

APPLICATION NO(S).:

FILING DATE

- ☒ Certified copy of applications

Country

Appln. No.

Filed

Korea

1999-11179

March 31, 1999

from which priority under Title 35 United States Code, § 119 is claimed
☒ is enclosed.

☐ will follow.

CALCULATION OF UTILITY APPLICATION FEE

For	Number Filed	Number Extra	Rate	Basic Fee \$690.00
TOTAL CLAIMS	20	0	x 18 =	\$0
INDEPENDENT CLAIMS	4	1	x 78 =	\$78.00
<input type="checkbox"/> Multiple Dep. Claim	0		260	\$0
			TOTAL \$768.00	

- ☐ Verified Statement of "Small Entity" Status Under 37 C.F.R. § 1.27. Reduced fees under 37 C.F.R. § 1.9(f) (50% of total) paid herewith \$.

*Includes all independent and single dependent claims and all claims referred to in multiple claims. See 37 C.F.R. § 1.75(c).


☒ The amount of \$40.00 for recording the attached Assignment is enclosed as a separate check.

☒ Two checks in the amount of \$768.00 and \$40.00 to cover the ☒ recording, ☒ filing fee(s) are attached.

☐ Charge fee to Deposit Account No. 04-1121. Order No. _____
TWO (2) COPIES OF THIS SHEET ARE ENCLOSED.

☒ Please charge any deficiency as well as any other fee(s) which may become due under 37 C.F.R. § 1.16 and 1.17, at any time during the pendency of this application, or credit any overpayment of such fee(s) to Deposit Account No. 04-1121. Also, in the event any extensions of time for responding are required for the pending application(s), please treat this paper as a petition to extend the time as required and charge Deposit Account No. 04-1121 therefor. TWO (2) COPIES OF THIS SHEET ARE ENCLOSED.

Date: March 31, 2000



Rocco S. Barrese
Reg. No. 25,253

DILWORTH & BARRESE
333 Earle Ovington Blvd.
Uniondale, NY 11553
Tel. No. (516) 228-8484
Fax. (516) 228-8516

**PORTABLE COMPOSITE COMMUNICATION TERMINAL FOR
TRANSMITTING/RECEIVING VOICE AND IMAGES, AND OPERATION
METHOD AND COMMUNICATION SYSTEM THEREOF**

5

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates generally to the field of wireless
10 communications, and in particular, to a portable composite communication terminal
for transmitting/receiving voice and images and a communication method and
system thereof.

2. Description of the Related Art

15 With the rapid development of information in society, there is an increasing
demand for a composite communication terminal having functions in addition to a
communication terminal solely for voice transmission. Currently, mobile phones
can transmit voice and text messages between the mobile phone and a base station.
In addition, there exist digital cameras which can take and store images digitally.
20 However, there are no devices which can take digital images and transmit them to
another device. Therefore, there exists a need for a device which can take digital
images and transmit them to another device. A mobile video phone (MVP),
according to the present invention, can provide voice and image transmission
services that will meet the demands of users in the multimedia era. The MVP is
25 equipped with a digital camera function in addition to the functions of a typical
portable communication terminal (e.g., portable phone). A user can therefore
photograph an object or images as needed in business and store the photographs in

the device. The MVP may also function as a radio transmitter and therefore the user can transmit/receive a desired image without logging into a personal computer (PC).

5

SUMMARY OF THE INVENTION

It is, therefore, an object of the present invention to provide a portable composite communication terminal which can transmit/receive voice and images.

10

It is another object of the present invention to provide a communication method and system for a portable composite communication terminal which can transmit/receive voice and images.

15

These and other objects are achieved by providing a communication system for voice communication and image transmission/reception. The communication system includes a portable composite communication terminal, such as a mobile video phone (MVP), a mobile communication network, and a server. The portable composite communication terminal has a camera unit for digitally capturing the image of an object, constructing the image in a predetermined format, compressing the formatted image, and storing the compressed image in the camera memory under a predetermined camera control, a portable phone unit for providing overall control to the mobile video phone and selectively performing voice communication and image transmission/reception according to a selected transmission mode among predetermined modes, a display for displaying images and characters under the control of the portable phone unit, and an interface unit for interfacing between the portable phone unit and the display to display images and characters on the display

20
25

under the control of the portable phone unit. The mobile communication network transmits/receives voice and images to/from the portable composite communication terminal. The server is connected to the mobile communication network and provides transmission/reception service of image data over the mobile
5 communication network.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects, features and advantages of the present
10 invention will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings in which:

FIG. 1 is a block diagram of a portable composite communication terminal for transmission of voice and images according to an embodiment of the present invention;

15 FIG. 2 is a schematic diagram of the portable composite communication terminal according to the embodiment of the present invention;

FIGs. 3A, 3B, and 3C illustrate an external view of the portable composite communication terminal according to the embodiment of the present invention;

FIG. 4 is a block diagram of a system for transmission of image data and E-
20 mail data between portable composite communication terminals according to the embodiment of the present invention;

FIG. 5 is a block diagram of a communication system in which the portable composite communication terminal can be used according to the embodiment of the present invention;

25 FIG. 6 is a flowchart depicting a control operation of the portable composite communication terminal in a portable phone mode and a camera mode according to the embodiment of the present invention;

FIG. 7 is a flowchart depicting a control operation of the portable composite communication terminal in a photography sub-mode of the camera mode according to the embodiment of the present invention;

FIG. 8 is a flowchart depicting an operation of the portable composite communication terminal in a play sub-mode of the camera mode according to the embodiment of the present invention;

FIG. 9 is a flowchart depicting a control operation for transmission of an E-mail message and image data in the portable composite communication terminal according to the embodiment of the present invention; and

FIG. 10 is a flowchart depicting a control operation for receipt of an E-mail message and image data in the portable composite communication terminal according to the embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

A preferred embodiment of the present invention will be described hereinbelow with reference to the accompanying drawings. In the following description, well-known functions or constructions are not described in detail since they would obscure the invention in unnecessary detail.

FIG. 1 is a block diagram of a portable composite communication terminal (hereinafter, referred to as mobile video phone: MVP) capable of transmitting voice and images according to an embodiment of the present invention. The MVP includes a camera unit 2 for capturing the image of an object, a portable phone unit 4 for transmitting/receiving voice or images, a display 8 for displaying images and characters, and an interface unit 6 for interfacing between the portable phone unit 4 and the display 8.

The camera unit 2 can be configured out of a digital still video camera in the MVP of FIG. 1. The structure and operation of the MVP according to the embodiment of the present invention will be described hereinbelow.

5

An image captured from an object is applied to a CCD (Charge Coupled Device) 12 through a lens portion 10. The lens portion 10 may include a zoom lens, a focus lens, and an iris, which are usually used for a digital still video camera. The lens portion 10 is simplified to enable a user to carry the MVP with more
10 convenience in accordance with the embodiment of the present invention. Specifically, mechanical devices and circuits like the zoom lens, a zoom lens driver, and an iris driver are omitted. The iris is used with a iris aperture size fixed to a predetermined degree due to the absence of the iris driver. However, the lens portion 10 can include all or some of the components of a typical lens portion
15 including the zoom lens, the focus lens, the iris, and their drivers, as needed.

The CCD 12 converts an optical signal of the object which passes through the lens portion 10 to an electrical signal (captured image signal) and a CDS/AGC (Correlated Double Sampling/Automatic Gain Control) 14 correlated-double
20 samples the captured image signal and controls the gain of the captured image signal. Noise produced in the CCD 12 is removed from the captured image signal by the correlated double sampling in the CDS/AGC 14. The CCD 12 and the CDS/AGC 14 can be configured on typical CMOS (Complementary Metal Oxide Semiconductor) sensor chips. An ADC (Analog-to-Digital Converter) 16 converts
25 the gain-controlled image signal of one field received from the CDS/AGC 14 to a digital signal. A DSP (Digital Signal Processor) 18 processes the digital signal received from the ADC 16 into an Y, C image signal of an NTSC (National

Television System Committee) or PAL (Phase Alternation by Line) format. The DSP 18 feeds the Y, C image signal to a JPEG (Joint Picture Expert Group) compressor 20 or the display 8 for displaying the Y, C image signal on a color graphic LCD (Liquid Crystal Display) 48 (hereinafter, referred to as a color LCD 5 48), under the control of a portable phone controller 32. Components Y and C of the Y, C image signal are a luminance signal and a chrominance signal, respectively.

For the DSP 18 to store the Y, C image signal in a first memory 22 through the JPEG compressor 20 or feed the Y, C image signal to the display 8, an object is 10 captured as a still image upon the user pressing a shutter key of the MVP in a camera mode. The DSP 18 applies the captured Y, C image signal to the first memory 22 through the JPEG compressor 20. On the other hand, if the shutter key is not entered in the camera mode, the DSP 18 temporarily stores the Y, C image signal in a third memory 28 through a camera controller 24 and then the stored Y, C image signal is 15 displayed on the color LCD 48 through the camera controller 24, the DSP 18, a selector 44, and an LCD driver 46. The user can view the object in the viewfinder of the MVP on the color LCD 48.

The JPEG compressor 20 converts the captured Y, C image signal received 20 from the DSP 18 to a JPEG formatted image signal and compresses the JPEG-formatted image signal to a predetermined size, under the control of the camera controller 24. Then, the first memory 22 stores the compressed image signal. The JPEG compressor 20 also decompresses the compressed image stored in the first memory 22 and applies the decompressed image to the DSP 18, under the control of 25 the camera controller 24. For example, the JPEG compressor 20 compresses a 640x480 VGA (Video Graphics Array) signal to its 1/8 size. The 640x480 image occupies about 300Kbytes, one eighth of which is about 40Kbytes. The first

memory 22 is a flash memory, for storing the compressed image received from the JPEG compressor 20. The capacity of the first memory 22 is adjusted according to the amount of captured image data, preferably to tens of pages (e.g., 50 pages) of captured images.

5

The camera controller 24 is a CPU (Central Processing Unit) and provides overall control to the camera unit 2. Upon receipt of a signal corresponding to a key input through a key pad 34 under the control of the portable phone controller 32, the camera controller 24 performs a corresponding operation. A second memory 26
10 connected to the camera controller 24 is usually an SRAM (Static Random Access Memory), for storing programs executed in the camera controller 24. The third memory 28 connected to the camera controller 24 is usually a DRAM (Dynamic Random Access Memory), acting as a buffer for temporarily storing an image received through the camera lens.

15

Now, the structure and operation of the portable phone unit 4 in the MVP of FIG. 1 will be described. The portable phone controller 32 provides overall control to the portable phone unit 4. The portable phone controller 32 operates the portable phone unit 4 or the camera unit 2 upon receipt of user key input, or stores an
20 intended image received from the camera unit 2 in a fourth memory 36. In addition, the portable phone controller 32 controls an OSD (On Screen Display) 40 of the interface unit 6 to display desired characters or a background image on the color LCD 48 of the display 8. The portable phone controller 32 can be configured on an MSM (Mobile Station MODEM) chip of Qualcomm, for example.

25

The key pad 34 is provided with digit keys and function keys usually used in a typical portable phone, and keys necessary to photograph and play back images.

Key data corresponding to user key input in the key pad 34 is applied to the portable phone controller 32. The keys for photographing and playing back images include a photography/play key, a mode key for selecting a camera environment, a shutter key, an enter key for setting a camera environment selected by the mode key, and a
5 switch for turning on/off a camera. Some of the keys in the portable phone are used in a camera mode.

FIGs. 3A, 3B, and 3C are a frontal view, left side view, and rear view respectively of the MVP according to the embodiment of the present invention.

10

Arrangement of the keys in accordance with the embodiment of the present invention will be described referring to FIGs. 3A and 3B. Reference numeral 300 denotes a display window being a color LCD. The display window 300 is used as a view finder in a camera mode. Reference numeral 308 denotes the digit keys and the
15 function keys provided to a typical portable phone. Keys 302, 304, and 306 above the keys 308 are used as a mode key, a shutter key, and an enter key, respectively, for photography and play. The mode key 302 selects a (partial or whole) delete function mode, a date function mode, a (fine or normal) display function mode, and a sensitivity function mode. The sensitivity of a still image is digitally controlled in
20 the sensitivity function mode.

It is preferable that a flip (not shown in FIG. 3A) of the MVP according to the embodiment of the present invention covers only the digit and function keys 308, with the mode key 302, the shutter key 304, and the enter key 306 exposed outward,
25 so that a user can photograph and reproduce an image using the keys 302, 304, and 306 without opening the flip of the MVP.

Reference numeral 316 denotes a photography/play key on the left side of the MVP, and reference numeral 314 denotes an RS232C jack above the photography/play 316, for a user to download a still image from a PC or upload a still image of the MVP to the PC. Reference numeral 312 denotes a volume up/down key for the portable phone. Upon user pressing the volume up/down key 312 in a play sub-mode of the camera mode, an image previous or next to a current image is displayed. Here, the play sub-mode refers to a mode for displaying a still image selected by the user among still images captured and stored on the color LCD 48. Reference numeral 310 in FIGs. 3A and 3B denotes a camera lens. The camera lens 310 is disposed at an upper portion of the rear side of the MVP in accordance with the embodiment of the present invention. Under the camera lens 310 is located a battery 320.

While the MVP is a flip type in FIGs. 3A, 3B, and 3C, it can be of a folder type or any other type.

Returning to FIG. 1, the fourth memory 36 connected to the portable phone controller 32 includes an EEPROM (Electrically Erasable and Programmable Read Only Memory), a flash ROM, and a RAM. Variables needed for executing programs are stored in the EEPROM, and data needed for controlling the portable phone is stored in the RAM. Operation programs, application programs, Internet protocols, radio link protocols, and CDMA (Code Division Multiple Access) protocols are mapped in the ROM. The application programs include programs for additional functions such as voice dialing, character recognition, PIM (Personal Information Management), and games, data functions such as browsing, E-mailing, and facsimile, and a user interface function such as GUI (Graphic User interface). The Internet protocols are a protocol for connecting the MVP to a PPP (Point to Point

Protocol) server and a protocol used over an Internet. TCP/IP/PPP (Transmission Control Protocol/Internet Protocol/Point to Point Protocol) is an example of the Internet protocols. The radio link protocols include an IS-657 packet data communication protocol and an RLP (Radio Link Protocol). The RLP is a protocol
 5 for converting general data for use in a CDMA protocol and recovering the general data. The CDMA protocols are an IS-95A CDMA protocol for 800MHz, a J-STD-008 CDMA protocol for 1.8GHz, and an IS-95B protocol at 64-114Kbps.

An area for storing part of user-intended data or images prior to radio
 10 transmission is reserved in the flash ROM, besides the programs and protocols. Though a large capacity buffer is required to store the entire page of images, the flash ROM of the fourth memory 36 assigns a small capacity buffer size, for example, of 600 bytes to store image data received by 512 byte units from the camera controller 24.

15

An audio portion 33 converts an analog voice signal received through a microphone (MIC) to a radio signal and feeds the radio signal to an RF (Radio Frequency) module 30, under the control of the portable phone controller 32. The audio portion 33 also demodulates a radio signal received from the RF module 30
 20 and outputs a voice signal through a speaker (SP), under the control of the portable phone controller 32. The RF module 30 downconverts and demodulates an RF signal received through an antenna and outputs the demodulated signal to the audio portion 33. The RF module 30 also modulates and upconverts a signal received from the audio portion 32 to an RF signal and wireless transmits the modulated
 25 signal through the antenna. A signal transmitted/received to/in the RF module 30 can be image and character data as well as a voice signal.

The RS232C interface 38 connected to the portable phone controller 32 is an interface for downloading/uploading a still image from/to a PC.

In FIG. 1, the interface unit 6 has the OSD (On Screen Display) 40, an encoder 42, and the selector 44.

The OSD 40 performs an OSD control operation for displaying characters or a background image downloaded from a PC on the color LCD 48 of the display 8, and outputs an R,G, B image signal, for example, an 8-bit digital signal. The DAC (Digital to Analog Converter) 41 converts the digital R, G, B signal received from the OSD 40 to an analog signals, and the encoder 42 encodes the analog R, G, B signal to an NTSC or PAL Y, C signal. The selector 44 is an analog multiplexer (MUX), for selecting the external image Y, C signal received from the DSP 18 of the camera unit 2 or the OSD image Y, C signal received from the encoder 42 and feeding the selected image signals to the display 8. The display 8 includes the LCD driver 46 and the color LCD and displays characters and images on the color LCD 48.

FIG. 2 illustrates two boards, namely, a portable phone board 100 and a camera board 200 in which the components shown in FIG. 1 are separately arranged according to the embodiment of the present invention. Referring to FIG. 2, while the RF module 30, the audio portion 33, the key pad 34, and the fourth memory 36 of the portable phone unit 4 shown in FIG. 1 are not shown in the portable phone board 100 and the CCD 12, the CDS/AGC 14, the ADC 16, the JPEG compressor 20, and the first, second, and third memories 22, 26, and 28 of the camera unit 2 shown in FIG. 1 are not shown in the camera board 200, it is to be noted that each board is provided with its corresponding components or circuit blocks.

Furthermore, it is also to be appreciated that a battery power voltage BATT(+) is 3.6V and an operational power ranges between 2.8 and 4.3V by way of example in FIG. 2. A regulator outputs 3.3V or any other voltage for the input of the
 5 battery power voltage 3.6V, and a power voltage being tens of volts is supplied through a DC/DC converter.

Both the portable phone board 100 and the camera board 200 shown in FIG. 2 are provided with a DC/DC converter (not shown) so that the two boards can
 10 operate together or individually. A connection unit 150 having a plurality of lines connects the two boards 100 and 200, for implementing a reliable operation and transmitting an operational command and images between boards 100 and 200.

In accordance with the embodiment of the present invention, a battery power
 15 line Batt (+) is connected between a power supply of the portable phone board 100 and a power supply of the camera board 200 to use a battery of a conventional portable phone for both the portable phone board 100 and the camera board 200. A ground line GND is connected between the boards 100 and 200 for stable operation. Data transmission and reception lines SD and RD are connected between the
 20 portable phone controller 32 and the camera controller 24 using UART (Universal Asynchronous Receiver/Transmitter) ports, for communicating commands and data between them. The portable phone controller 32 orders all operations of the camera unit 2, including photography and reproduction, determines whether the ordered operations are performed reliably, and communicates image data for image
 25 transmission, through the data transmission and reception lines SD and RD. Key data related with camera operations received through the key pad 34 of FIG. 1 under the control of the portable phone controller 32 is applied to the camera controller 24

through the data transmission and reception lines SD and RD.

According to the embodiment of the present invention, the camera board 200 of the MVP includes a camera on/off switch 318 and an RS-232C jack 314 for downloading/uploading data from/to a PC. The camera on/off switch 318 has an end grounded and the other end connected to a line CP_CHECK which is in turn connected to a port GPIO(CP_CHECK) of the portable phone controller 24. A power voltage 3.3V, for example, is connected to the line CP_CHECK through a resistor. A line CAM_PWR_CTRL is connected between a port GPIO(CAM_CTRL) of the portable phone controller 32 and the camera controller 24, so that the portable phone controller 32 can sense a user pressing the camera on/off switch 318 through the line CP_CHECK, controls the camera controller 24 through the line CAM_PWR_CTRL, and thus turns on/off the camera unit 2. Only a leakage current of several mili-amperes (mA) is applied to the camera unit 2 to prevent the misoperation of the camera controller 24 when the camera unit 2 turns off. When the user turns off the camera unit 2 with the camera on/off switch 318, the camera controller 24 terminates the operation of the camera unit 2 by using the leakage current. The operations of circuits and mechanical devices in the camera unit 2 are controlled by the camera controller 24 which is in turn controlled by the portable phone controller 32.

Meanwhile, an LCD power supply 202 is provided to the camera board 200, for supplying a power voltage to the LCD driver 46 and the color LCD 48, and a back light power supply 102 is provided to the portable phone board 100, for supplying a power voltage to an LCD back light 204. The portable phone controller 32 controls the on/off state of LCD power supply 202 to reduce the power dissipation associated with the operation of the color LCD 48. That is, a port

GPIO(LCD_CTRL) on the portable phone controller 32 is connected to the bases of a first and a second transistor 114 and 116. The first transistor 114 has a collector to which 3.3V is applied and an emitter grounded. A line MUX_PWR is connected between the collector of the first transistor 114 and the selector 44, for supplying 5 3.3V to selector 44. The second transistor 116 has a collector connected to the battery power voltage BATT(+) and an emitter connected to ground. A line LCD_PWR is connected between the collector of the second transistor 116 and the LCD power supply 202 and between the collector of the second transistor 116 and a DC (Direct Current) power supply 206. Hence, the portable phone controller 32 can 10 control the LCD power supply 202 and the DC power supply 206 by use of the port GPIO(LCD_CTRL). A line ENC_PWR connects the DC power supply 206 of the camera board 200 to the encoder 42 of the portable phone board 100, for supplying a DC power voltage to the encoder 42.

15 While the LCD driver 46, the LCD power supply 202, the selector 44, and the DC power supply 206 are located on the camera board 200 in the embodiment of the present invention, they can be on the portable phone board 100 when necessary.

As shown in FIG. 2, the OSD 40 in the interface unit 6 includes a main 20 processing unit (MPU) 104, an OSD signal processor 106, a program ROM 108, and a flash memory 110. Each component block can be configured with a chip.

The MPU 104 provides overall control to the OSD 40. The OSD signal processor 106 displays an intended character at a specific position of a current 25 displayed still image on the color LCD 48 in synchronization with an external color sync signal C_Sync (included in the luminance signal Y) received from the DSP 18, or displays only characters or a downloaded background image on the color LCD 48

in synchronization with an internal color sync signal C_Sync. Operation programs, fonts, and icons are mapped in the program ROM 108, and a plurality of pages of background images downloaded from a PC are stored in the flash memory 110.

5 The OSD signal processor 106 is preferably configured with an ASIC (Application Specific Integrated Circuit), and its structure and operation will be described in more detail below. Since a conventional method of displaying characters on a black and white character-type LCD does not apply to the color LCD 48 of the present invention, the OSD signal processor 106 converts intended
10 characters and images to a form suitable for the color LCD 48 using data DATA 0-7, address A0, a write signal WR, a chip select signal CS, and a reset signal RESET, for example, from an MSM chip of the conventional portable phone controller 32. In order to convert the characters and images, the OSD signal processor 106 receives a clock signal CLK (e.g., 27MHz) used in the MSM chip from the portable phone
15 controller 32. The portable phone controller 32 can turn on/off 3.3V supplied to the OSD 40 through an internal port GPIO(OSD_CTRL). That is, a third transistor 118 has a base connected the port GPIO(OSD_CTRL) of the MSM chip being the portable phone controller 32, an emitter grounded, and a collector connected to the OSD signal processor 106 through a PWR 3.3V line. A power voltage 3.3V is
20 applied to the collector of the third transistor 118. Thus, the portable phone controller 32 can turn on/off 3.3V to/from the OSD 40 through the port6 GPIO(OSD_CRL).

A line OSD_SD connects the RS232C jack 314 of the camera board 200 to
25 the OSD signal processor, so that the user can download a desired still image from the PC utilizing the RSC232C jack 314 for use as a background on the color LCD 48.

The OSD signal processor 106 operates under the control of the MPU 104 of the OSD 40 and outputs an R, G, B signal and a color sync signal C_Sync. The R, G, B signal is an 8-bit digital signal for representing 256 colors (R: 3bits, G: 3bits, 5 and B: 2bits).

Synchronization should be provided to the camera of the MVP in order to represent desired characters in an image which is being photographed or played back. For this purpose, a line C_Sync is connected between the DSP 18 and the 10 OSD signal processor 106, so that the DSP 18 applies the external color sync signal C_Sync to the OSD signal processor 106 as a color sync signal for the current photographed or retrieved image data. The OSD signal processor 106, synchronized to the external color sync signal C_Sync, controls a specific character in a predetermined area of an image displayed on the color LCD 48.

15

The OSD signal processor 106 includes an internal sync signal generator (not shown). The internal sync signal generator generates the internal sync signal C_Sync for displaying a background image or characters on the color LCD 48 in a portable phone mode because the DSP 18 does not output the external sync signal 20 C_Sync in the portable phone mode.

The D/A converter 41 of FIG. 1 converts the 8-bit digital R,G,B signal received from the OSD signal processor 106 to an analog signal. For the input of the analog R,G,B signal from DAC 41 and the color sync signal C_Sync from the OSD 25 signal processor 106, the encoder 42 outputs an OSD image Y,C signal in response to a clock signal at 3.5794MHz received from the clock signal generator 112.

3.3V are applied to the selector 44 through a line MUX_PWR. The line MUX_PWR is connected to the collector of the first transistor 114, to which 3.3V is applied. The first transistor 114 has an emitter grounded and a base connected to a port GPIO(LCD_CTRL) of the portable phone controller 32. The portable phone
 5 controller 32 controls 3.3V to selectively be applied to the selector 44 through the port GPIO(LCD_CTRL).

The image Y, C signal output from the DSP 18 of the camera unit 2 or the image Y, C signal output from the encoder 42 is selectively fed to the display 8. The
 10 OSD signal processor 106 controls the selection in the selector 44 through a line MUX_CTRL connected between the OSD signal processor 106 and the selector 44. The OSD signal processor 106 controls the selector 44 to select the OSD image Y, C signal received from the encoder 42 through the line MUX_CTRL at the time when characters or a background image needs to be output.

15

A detailed description of a control operation in the MVP according to the embodiment of the present invention will be given in connection to FIGs. 1 to 6. Referring now to FIG. 6, there is shown a flowchart illustrating an operation control procedure in the MVP according to the embodiment of the present invention. When
 20 a user turns on the MVP in step 600, the portable phone controller 32 enters a portable phone mode in step 602. Then, the portable phone controller 32 controls a portable phone operational power voltage to be supplied in step 604. That is, the power voltage is supplied to the portable phone unit 4, the selector 44 of the interface unit 6, and the display 8. In step 606, the portable phone controller 32
 25 performs a function related with a typical portable phone. A power voltage is not supplied to the other circuits and device drivers of the camera unit 2 except for the camera controller 24 in the portable phone mode.

Referring back to FIG. 2, for supply of the power voltage in the portable phone mode, the portable phone controller 32 controls the power voltage to be supplied to the LCD power supply 202, the DC power supply 206, the back light power supply 102, and the selector 44 through the port GPIO(LCD_CTRL). Therefore, the power voltage is applied to the selector 44, the LCD power supply 202 applies the power voltage to the LCD driver 46 and the color LCD 48, the DC power supply 206 applies the power voltage to the encoder 42, and the back light power supply 102 applies the power voltage to a back light 204. The power voltage is also supplied (not shown) to the camera controller 24 of the camera unit 2.

Upon request for E-mail transmission in the portable phone mode in step 608, the portable phone controller 32 enters an E-mail transmission sub-mode in step 610.

15

Meanwhile, when the camera function in the MVP is used, the user turns on the camera on/off switch 318 on the left side of the MVP. The portable phone controller 32 senses the on-state of the camera on/off switch 318 in step 612 and enters a camera mode in step 614. Then, the portable phone controller 32 controls the camera controller 24 in order to supply a power voltage to the camera unit 2 in step 616 and controls the OSD 40 to display a message indicating the camera mode in graphics or characters on the color LCD 48 in step 618.

If the user presses the photography/play key 316 on the left side of the MVP in the camera mode in step 620, the portable phone controller 32 checks whether user presses the photography/play key 316 again in step 622, if not, the controller 32 enters a photography sub-mode in step 624. If the photography/play key 316 is

entered for the second time, the portable phone controller 32 enters a play sub-mode in step 626. Every time the user presses the photography/play key 316, the photography sub-mode and the play sub-mode are toggled.

5 Referring to FIG. 7, there is shown a flowchart illustrating a control operation in the MVP in a photography sub-mode of a camera mode. When the photography sub-mode is set in step 624 of FIG. 6, the camera controller 24 controls an object in sight of the camera lens to be displayed on the color LCD 48 in step 700. The object is temporarily stored in the third memory 28 through the lens
10 portion 10, the CCD 12, the CDS/AGC 14, the ADC 16, the DSP 18, and the camera controller 24 and then displayed on the color LCD 48 through the camera controller 24, the DSP 18, the selector 44, and the LCD driver 46.

The user views the intended object on the color LCD 48 acting as a view
15 finder and presses the shutter key 306 on the frontal side of the MVP as shown in FIG. 3A to capture the image of the object in step 702. The portable phone controller 32 controls the camera controller 24 to photograph the object at the time point when the user presses the shutter key 306 in step 704. Then, the portable phone controller 32 controls the camera controller 24 to store the captured image
20 data in the first memory of the camera unit 2, while controlling the OSD 40 to display a photography wait message on the color LCD 48, in step 706. Text characters "WAIT" can be an example of the photography wait message.

In step 708, it is determined whether the photography/play key 316 is
25 entered in the current photography sub-mode. In the absence of the input of the photography/play key 316, the procedure returns to step 700. Upon input of the photography/play key 316, the photography sub-mode is toggled to the play sub-

mode in step 626 of FIG. 6.

Meanwhile, if the shutter key 316 is not entered in the photography sub-mode in step 702, the portable phone controller 32 determines whether the camera on/off switch 318 is off in step 710. In the off-state of the camera on/off switch 318, the portable phone controller 32 controls the camera controller 24 to block a power voltage from the camera unit 2 in step 712 and returns to the portable phone mode in step 602 of FIG. 6. On the contrary, in the on-state of the camera on/off switch 318, the portable phone controller 32 determines in step 714 whether the MVP is powered-off. If the MVP is powered-off, the portable phone controller 32 ends the procedure, and otherwise, it returns to step 700 of FIG. 7.

The control operation of the MVP in the play sub-mode of step 614 will be described in more detail referring to FIG. 8. Referring to FIG. 8, there is shown a flowchart illustrating a control operation in the MVP in a play sub-mode of the camera mode. The play sub-mode allows the user to view a captured image on the color LCD 48 and can be performed in the camera mode.

Upon selection of the play sub-mode, the portable phone controller 32 controls the camera controller 24 to display the latest captured still image on the color LCD 48 in step 800. That is, the camera controller 24 reads out the last stored still image from the first memory and displays it on the color LCD under the control of the portable phone controller 32.

Upon the pressing of the volume up/down key 312 in this situation, the portable phone controller 32 controls the camera controller 24 to display a captured still image on the color LCD 48 depending on the volume up/down input. For

example, the next still image is displayed on the color LCD for the input of the volume-up key data and the previous still image is displayed on the color LCD 48 for the input of the volume-down key data.

5 The portable phone controller 32 determines whether the photography/play key has been entered in step 806. Upon entry of the photography/play key 316, the play sub-mode is toggled to the photography sub-mode in step 624 of FIG. 6 and otherwise, the portable phone controller 32 returns to step 802.

10 If the volume up/down key 312 is not entered in step 802, the portable phone controller 32 determines whether the camera on/off switch 318 is off in step 808. In the off-state of the camera on/off switch 318, the portable phone controller 32 controls the camera controller 24 to block the power voltage from the camera unit 2 in step 809 and then returns to the portable phone mode in step 602. In the on-state
15 of the camera on/off switch 318, the portable phone controller 32 determines whether an E-mail transmission has been requested from the user in step 810. Upon user request for the E-mail transmission, the portable phone controller 32 returns to the E-mail transmission sub-mode in step 610. By selecting the E-mail transmission sub-mode in the play sub-mode, the user can transmit an E-mail with a still image
20 enclosed therein.

 If the E-mail transmission sub-mode is not set in step 810, the portable phone controller 32 determines whether the MVP is powered-off in step 814. If the MVP is powered-off, the portable phone controller 32 ends the procedure, and
25 otherwise, the portable phone controller 32 returns to step 802.

In the E-mail transmission sub-mode, an E-mail is transmitted in accordance

with the embodiment of the present invention. Before describing the transmission/reception of an E-mail message and image data in detail, a description of a communication system and network for transmission/reception of an E-mail message and image data will be presented referring to FIGs. 4 and 5.

5

Referring to FIG. 4, there is shown a concept view of the inter-MVP image data or E-mail transmitting system according to the embodiment of the present invention. An MVP 400 transmits an E-mail or image data to an E-mail server 406 through a PPP service provider 402 and an Internet 404. The E-mail server 406 in turn transmits the received E-mail or image data to another MVP 412 through an Internet 408 and a PPP service provider 410. The E-mail server 406 includes an SMTP (Sending Mail Transfer Protocol) server and a POP (Post Office Protocol) server for transmitting the E-mail and image data from the E-mail server 406.

Referring now to FIG. 5, there is shown a block diagram of a communication system for transmitting/receiving voice and image data using the MVP of the present invention. The communication system includes MVPs 500 and 600, base stations 502 and 602 communicating with the MVPs 500 and 600, PPP servers 504 and 604, Internets 514 and 614 connected to the PPP servers 504 and 604, an E-mail server 516 connected to the Internets 514 and 614, PCs 508 and 608, MODEMS 508 and 608 connected between the PCs 508 and 608 and the PPP servers 504 and 604, and LANs (Local Area Networks) 512 and 612 connected between the PCs 508 and 608 and the Internets 514 and 614. The base stations 502 and 602 belong to mobile communication networks 506 and 606, and the E-mail server 516 includes SMTP servers 518 and 618 for receiving an E-mail and image data and POP servers 520 and 620 for transmitting an E-mail and image data.

An application program for E-mail is stored in the fourth memory 36 of the portable phone unit 4, therefore, the MVP can perform an E-mail function without an extra connection to a computer. In accordance with the embodiment of the present invention, the data packet communication standard, IS-657 is applied for
5 implementation of an E-mail function, and images are appended to the contents of an E-mail by a compression method as provided by the international still image compression standard, JPEG.

Transmission of image data and an E-mail will be described in detail with
10 reference to FIGs. 1 to 5 and FIG. 9. An MVP user can select an E-mail transmission sub-mode in a portable phone mode or in a play sub-mode of a camera mode. Referring to FIG. 9, there is shown a flowchart illustrating a control operation for transmitting E-mail and image data in the MVP according to the embodiment of the present invention.

15

Upon selection of the E-mail transmission sub-mode, the portable phone controller 32 controls the OSD 40 to display a message requesting entry of the address of the other party on the color LCD 48 in step 900 of FIG. 9. When the user enters the address of the other party through the key pad 34 in step 902, the portable
20 phone controller 32 requests entry of a message (title and contents) to the user through the color LCD 48 in step 904. Upon user entry of the message in step 906, the portable phone controller 32 displays a message asking whether an image is to be enclosed on the color LCD 48 in step 907.

25

The user presses a key corresponding to image enclosure if he wants to enclose an image in the E-mail transmission sub-mode. Therefore, if the user directly presses a send key, this implies that no image is enclosed in the E-mail

transmission sub-mode. In step 908, the portable phone controller 32 determines whether the send key has been entered. Upon entry of the send key, the portable phone controller 32 proceeds to step 914, and otherwise, the portable phone controller 32 determines whether the image enclosure key has been entered in step 5 910. Upon user request for image enclosure in step 910, the portable phone controller 32 performs a control operation to enclose an image in the E-mail in step 912. The image enclosure operation is performed in steps 626, 800, 802, and 804. After step 912, the portable phone controller 32 returns to step 908.

10 Meanwhile, upon entry of the send key in step 908, the portable phone controller 32 determines whether there is any still image to be enclosed in the E-mail. If the E-mail transmission sub-mode is selected in the play sub-mode of the camera mode, this implies that image data to be enclosed in the E-mail exists. If the image enclosure operation is implemented in the E-mail transmission sub-mode 15 selected in the portable phone mode, as in step 912, this implies that image data to be enclosed in the E-mail exists. However, if only the E-mail transmission sub-mode is selected in the portable phone mode, this implies that no image data enclosed in the E-mail exists.

20 In the presence of a still image to be enclosed in the E-mail in step 914, the portable phone controller 32 transmits the received message (title and contents) and the enclosed still image to the E-mail server 510 in packets, while displaying a message indicating E-mail transmission on the color LCD 48, in step 916. In the absence of a still image to be enclosed in the E-mail in step 914, the portable phone 25 controller 32 transmits the received message (title and contents) to the E-mail server 510 in packets, while displaying the message indicating E-mail transmission on the color LCD 48 in step 918.

Upon completion of the E-mail transmission in step 920, the portable phone controller 32 displays a message indicating completed transmission on the color LCD 48 in step 922 and blocks a power voltage from the camera unit 2 in step 924.

5 Thus, the portable phone controller 32 enters the portable phone mode 602.

Packet transmission of an E-mail with a still image enclosed therein in step 916 of FIG. 9 will be described in more detail. Still image data is transmitted by the data block size of a typical digital still video camera, for example, by 512 byte units,

10 between the camera unit 2 and the portable phone unit 4 in the MVP, and the MVP transmits data in packets to the E-mail server 516. A packet is of length 584 bytes, including a 536-byte data block, an 8-byte header, a 20-byte TCP (Transmission Control Protocol), and a 20-byte IP (Internet Protocol).

15 For packet transmission, the portable phone controller 32 reads still image data of about 40Kbytes in 512 byte units from the first memory 22 of the camera unit 2 and temporarily stores the read data in the fourth memory 36 of the portable phone unit 4. Then, the 512-byte long image data is appended to the message (tile and contents) of an E-mail and the resulting message is loaded in the data block of 536

20 bytes. In this manner, the image data is transmitted in packets.

Assuming that the still image of about 40Kbytes and the contents of the E-mail message are about 60Kbytes, the MVP can transmit data of about 70Kbytes including data and a header of a packet for about 60 seconds at 9600bps (= 70Kbytes

25 x 8). Here, 9600bps is a data transmission rate in a CDMA system.

Referring back to FIG. 5, the MVP 500 connects to the PPP server 504

through the base station 502 and a PPP service provider 504 and then to the E-mail server 516 using the TCP/IP protocol. The MVP 500 can upload an E-mail having image data enclosed therein to the E-mail server 516 using the POP server 520 of the E-mail server, or download an E-mail or an E-mail having image data enclosed therein from the E-mail server 516 using the SMTP server 518 of the E-mail server 516.

Upon receipt of an E-mail, the E-mail server 516 notifies a terminal of the other party, for example, the PC 608 or the MVP 600 of the arrival of the E-mail.

10

Referring to FIG. 10, there is shown a flowchart illustrating a control operation for reception of an E-mail and image data in the MVP according to the embodiment of the present invention. Upon receipt of an E-mail in step 1000, the portable phone controller 32 of the MVP displays a message notifying receipt of the E-mail and a server phone number on the color LCD 48 in step 1002. If the user enters the send key in the key pad 34 to check an E-mail message, the portable phone controller 32 establishes a call with the E-mail server in step 1006. In step 1008, the portable phone controller 32 downloads the tile of the E-mail and displays it on the color LCD 48 in step 1008. When the user presses a specific key to read the E-mail message in step 1010, the portable phone controller 32 downloads message contents, information about the presence or absence of enclosed image data, and the file size of the enclosed image, and displays the downloaded information on the color LCD 48 in step 1012.

Then, when the user requests downloading the enclosed image in step 1014, the portable phone controller 32 downloads the enclosed image in step 1016. In step 1018, the portable phone controller 32 determines whether the download is

completed. Upon completion of the download, the portable phone controller 32 displays a message indicating completed downloading on the color LCD 48 in step 1020. On the other hand, if the download is not completed, the portable phone controller 32 determines whether a an end key has been entered in step 1022. To
5 suspend the download for such a reason as a long download time, the user just presses the end key. The portable phone controller 32 determines whether the end key has been entered in step 1022. Upon input of the end key, the portable phone controller 32 ends the procedure.

10 As described above, the MVP of the present invention acts as both a general portable communication terminal and a digital camera. Accordingly, it can play back photographed images, transmit/receive images, and perform voice communication.

15 While the invention has been shown and described with reference to a certain preferred embodiment thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the spirit and scope of the invention as defined by the appended claims.

WHAT IS CLAIMED IS:

1. A portable composite communication terminal for voice communication and image transmission/reception, comprising:

5 a camera unit that digitally captures the image of an object, constructs the image in a predetermined format, compresses the formatted image, and stores the compressed image in the camera memory under a predetermined camera control;

a portable phone unit that provides overall control to the portable composite communication terminal and selectively performs voice communication and image
10 transmission/reception according to a selected transmission mode among predetermined modes;

a display that displays images and characters under the control of the portable phone unit; and

an interface between the portable phone unit and the display to display
15 images and characters on the display under the control of the portable phone unit.

2. The portable composite communication terminal of claim 1, further comprising a key pad having a plurality of keys that interface with the portable phone unit and a plurality of keys that interface with the camera unit, for use in
20 photographing and reproducing an image.

3. The portable composite communication terminal of claim 2, wherein the keys related with the camera unit include a photograph/play key, a mode key for selecting a camera environment, a shutter key for capturing an object image, an
25 enter key for setting a camera environment selected by the mode key, and a camera on/off switch.

4. The portable composite communication terminal of claim 3, wherein the mode key, the shutter key, and the enter key are located on the frontal surface of the portable composite communication terminal.

5 5. The portable composite communication terminal of claim 3, wherein modes selected by the mode key includes a delete function mode, a data function mode, a display function mode, and a sensitivity function mode.

6. The portable composite communication terminal of claim 3, wherein
10 the photography/play key and the camera on/off switch are provided on a side of the portable composite communication terminal.

7. The portable composite communication terminal of claim 4, wherein the mode key, the shutter key, and the enter key are exposed when a flip is folded in
15 the portable composite communication terminal.

8. The portable composite communication terminal of claim 1, wherein the camera unit has a lens at an upper portion of the rear surface of the portable composite communication terminal.

20

9. The portable composite communication terminal of claim 1, wherein the portable phone controller controls a battery power voltage to be supplied to the camera unit when a user turns on the camera on/off switch.

25 10. The portable composite communication terminal of claim 1, wherein the portable phone controller controls an LCD power supply to the display unit when a user turns on the camera on/off switch.

11. The portable composite communication terminal of claim 9, wherein the portable phone controller controls an operational voltage supplied to the camera controller when the terminal is in a portable phone mode by turning off the camera
5 on/off switch.

12. The portable composite communication terminal of claim 1, wherein the interface unit comprises:

an on screen display (OSD) controller that controls one of a downloaded
10 background image on the display and characters; and

a selector that selectively outputs an external image signal received from one of the camera unit and an OSD image signal received from the OSD controller under the control of the OSD controller.

13. The portable composite communication terminal of claim 1, wherein the portable phone unit comprises a memory having an operation program, an application program, a data function, and a user interface function, an Internet protocol inclusive of a protocol to connect the portable composite communication terminal to a point to point (PPP) protocol server and a protocol needed over an
15 Internet, a radio link protocol for establishing a radio link, and a communication protocol.

14. The portable composite communication terminal of claim 13, wherein the application program includes the additional functions of a voice dialing,
25 character recognition, game information management, and game function, the data function includes a browsing, E-mail, and facsimile function, and the user interface function includes a graphics user interface.

15. The portable composite communication terminal of claim 1, wherein the camera unit comprises means for converting the digitally captured image to a JPEG format, compressing the formatted image data, storing the compressed image data in the camera memory, and decompressing the stored compressed image data under a predetermined read control.

16. A communication system for transmission and reception of voice and images, comprising:

10 a portable composite communication terminal having a camera unit that digitally captures the image of an object, constructs the image in a predetermined format, compresses the formatted image, and stores the compressed image in the camera memory under a predetermined camera control, a portable phone unit that provides overall control to the mobile visible phone and selectively performs voice communication and image transmission and reception according to a selected transmission mode among predetermined modes, a display that displays images and characters under the control of the portable phone unit, and an interface between the portable phone unit and the display that displays images and characters on the display under the control of the portable phone unit;

20 a mobile communication network for transmission and reception of voice and images to and from the portable composite communication terminal; and

a server connected to the mobile communication network, for providing transmission and reception service of image data over the mobile communication network.

25

17. A method of operating a portable composite communication terminal which functions as both a portable phone and a camera, comprising the

steps of:

setting a portable phone mode by turning on the portable composite communication terminal, regulating voltage supporting components of the portable phone mode, and performing a general portable phone function;

- 5 setting a camera mode upon user request for camera operation, regulating voltage supporting components of the camera mode, and performing a camera function;

capturing the image of an object upon user request for a photograph in the camera mode; and

- 10 displaying a captured image stored in a camera memory of the portable composite communication terminal on a display of the portable composite communication terminal upon user request for displaying the image.

18. The method of claim 17, wherein a first voltage is supplied to a
15 portable phone unit of portable composite communication terminal when the portable phone mode is set.

19. The method of claim 17, wherein a second power voltage is
supplied to a camera unit of portable composite communication terminal when the
20 portable phone mode is set.

20. A data transmitting method for a portable composite communication terminal which functions as both a portable phone and a camera, comprising the steps of:

- 25 entering a first E-mail transmission sub-mode upon user request for E-mail transmission while operating in a portable phone mode, the first e-mail transmission sub-mode performing a portable phone function;

entering a second E-mail transmission sub-mode upon user request for E-mail transmission while operating in a display sub-mode, the second e-mail transmission sub-mode displaying an image captured in a camera mode;


transmitting the address of the other party and a message received through a
5 user interface in the first E-mail transmission sub-mode; and

transmitting the address of the other party and the message received through the user interface and the image displayed on the display as an E-mail in the second E-mail transmission sub-mode.

ABSTRACT OF THE DISCLOSURE

A portable composite communication terminal for voice communication and image transmission and reception, and an operation method and
5 communication system thereof. The communication system includes a portable composite communication terminal, a mobile communication network, and a server. The portable composite communication terminal has a camera unit for digitally capturing the image of an object, constructing the image in a predetermined format, compressing the formatted image, and storing the
10 compressed image in the camera memory under a predetermined camera control, a portable phone unit for providing overall control to the mobile visible phone and selectively performing voice communication and image transmission and reception according to a selected transmission mode among predetermined modes, a display for displaying images and characters under the control of the
15 portable phone unit, and an interface unit for interfacing between the portable phone unit and the display to display images and characters on the display under the control of the portable phone unit. The mobile communication network transmits and receives voice and images to and from the portable composite communication terminal. The server is connected to the mobile communication
20 network and provides transmission and reception service of image data over the mobile communication network.

FIG. 1

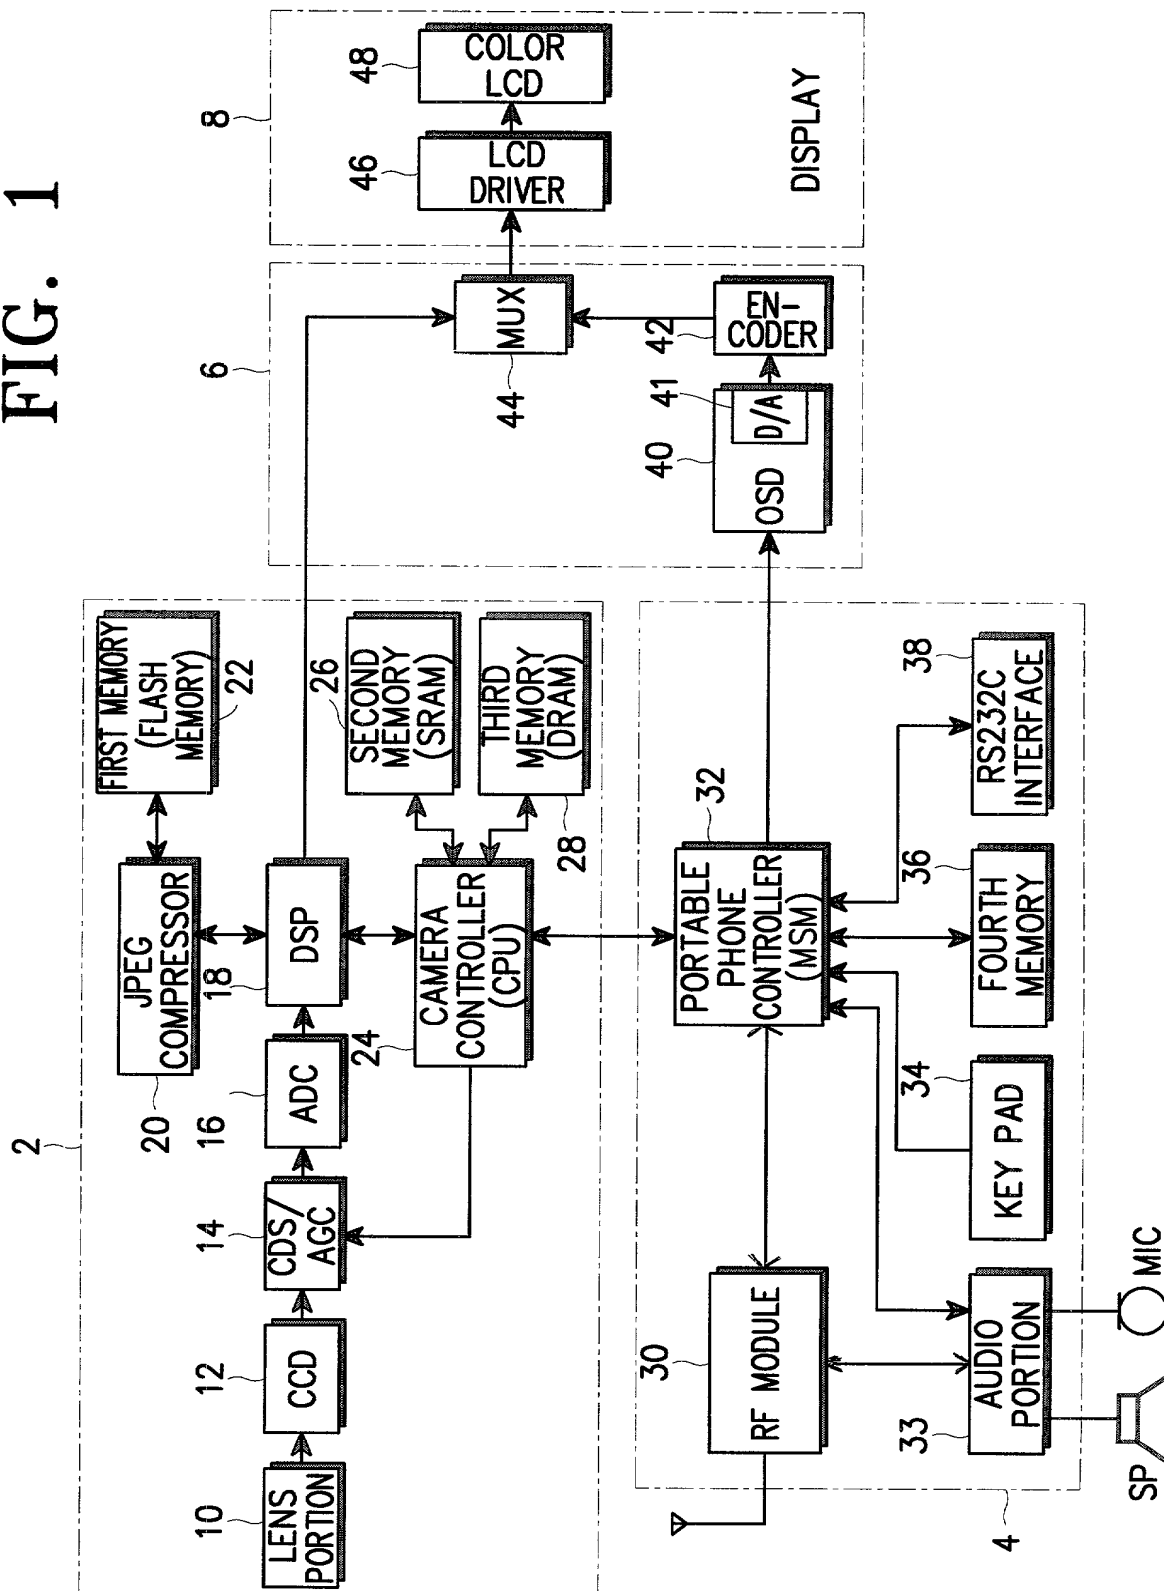

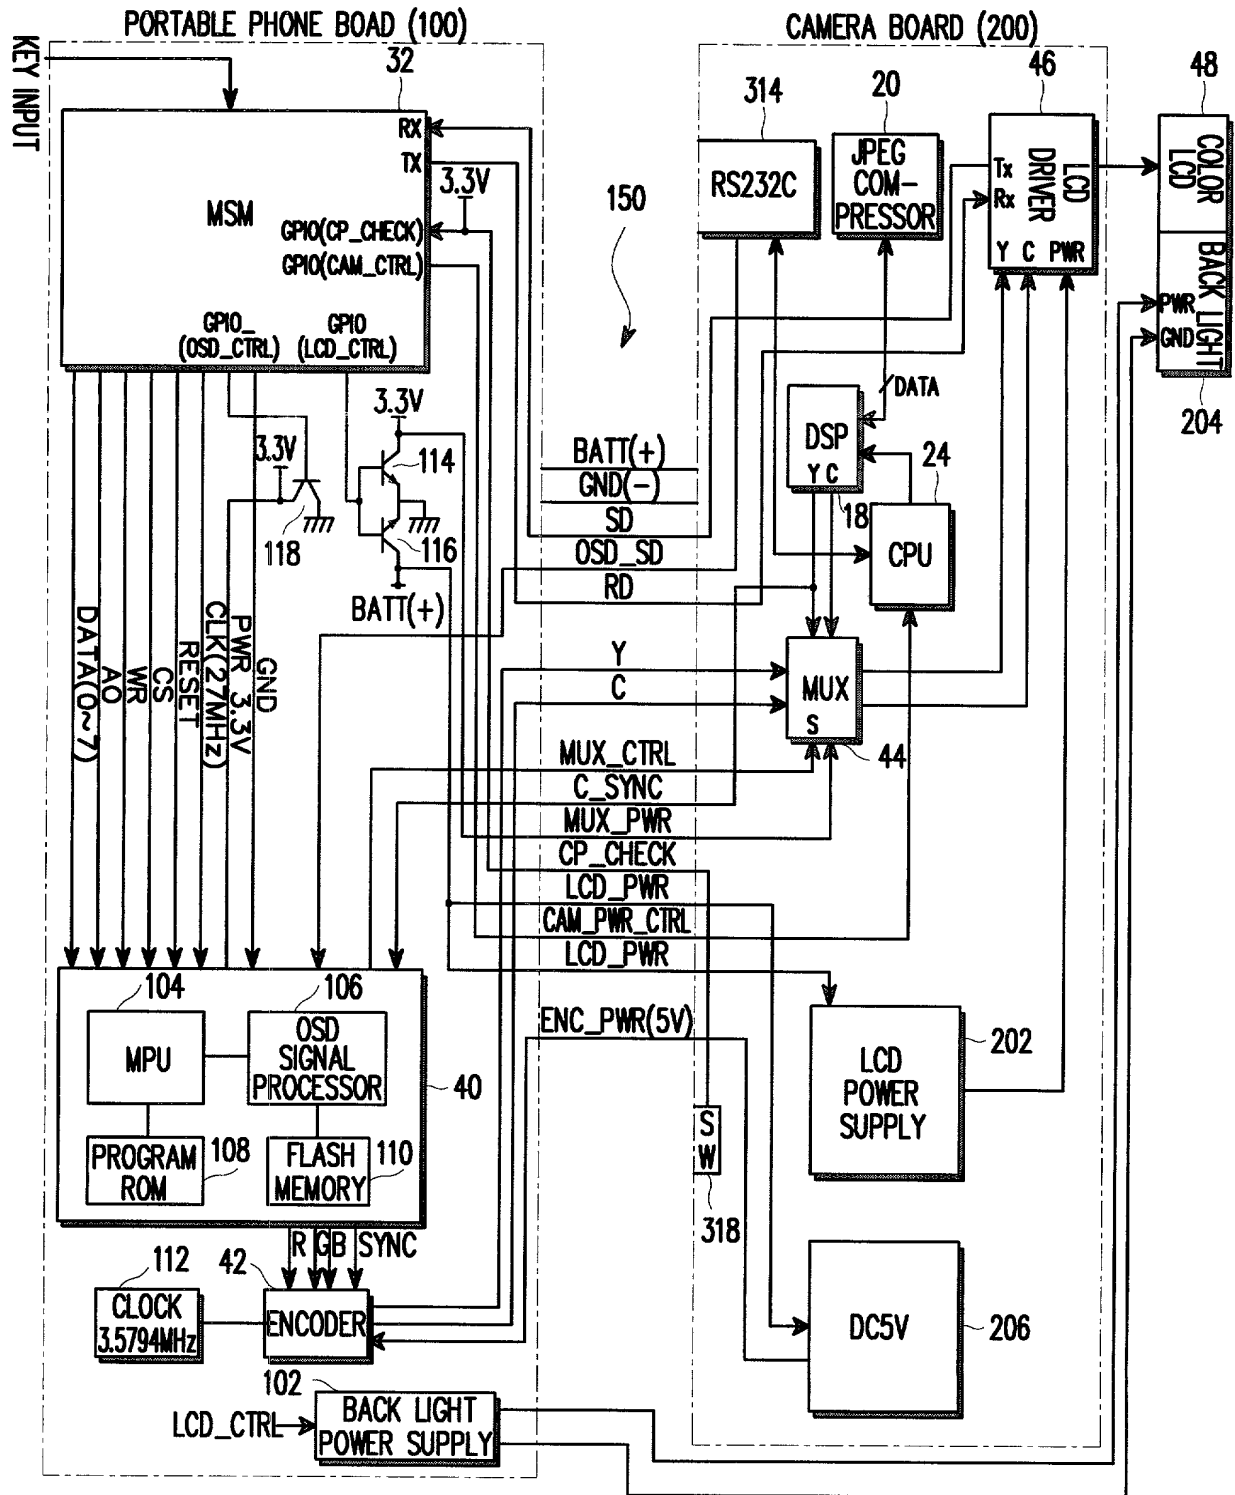
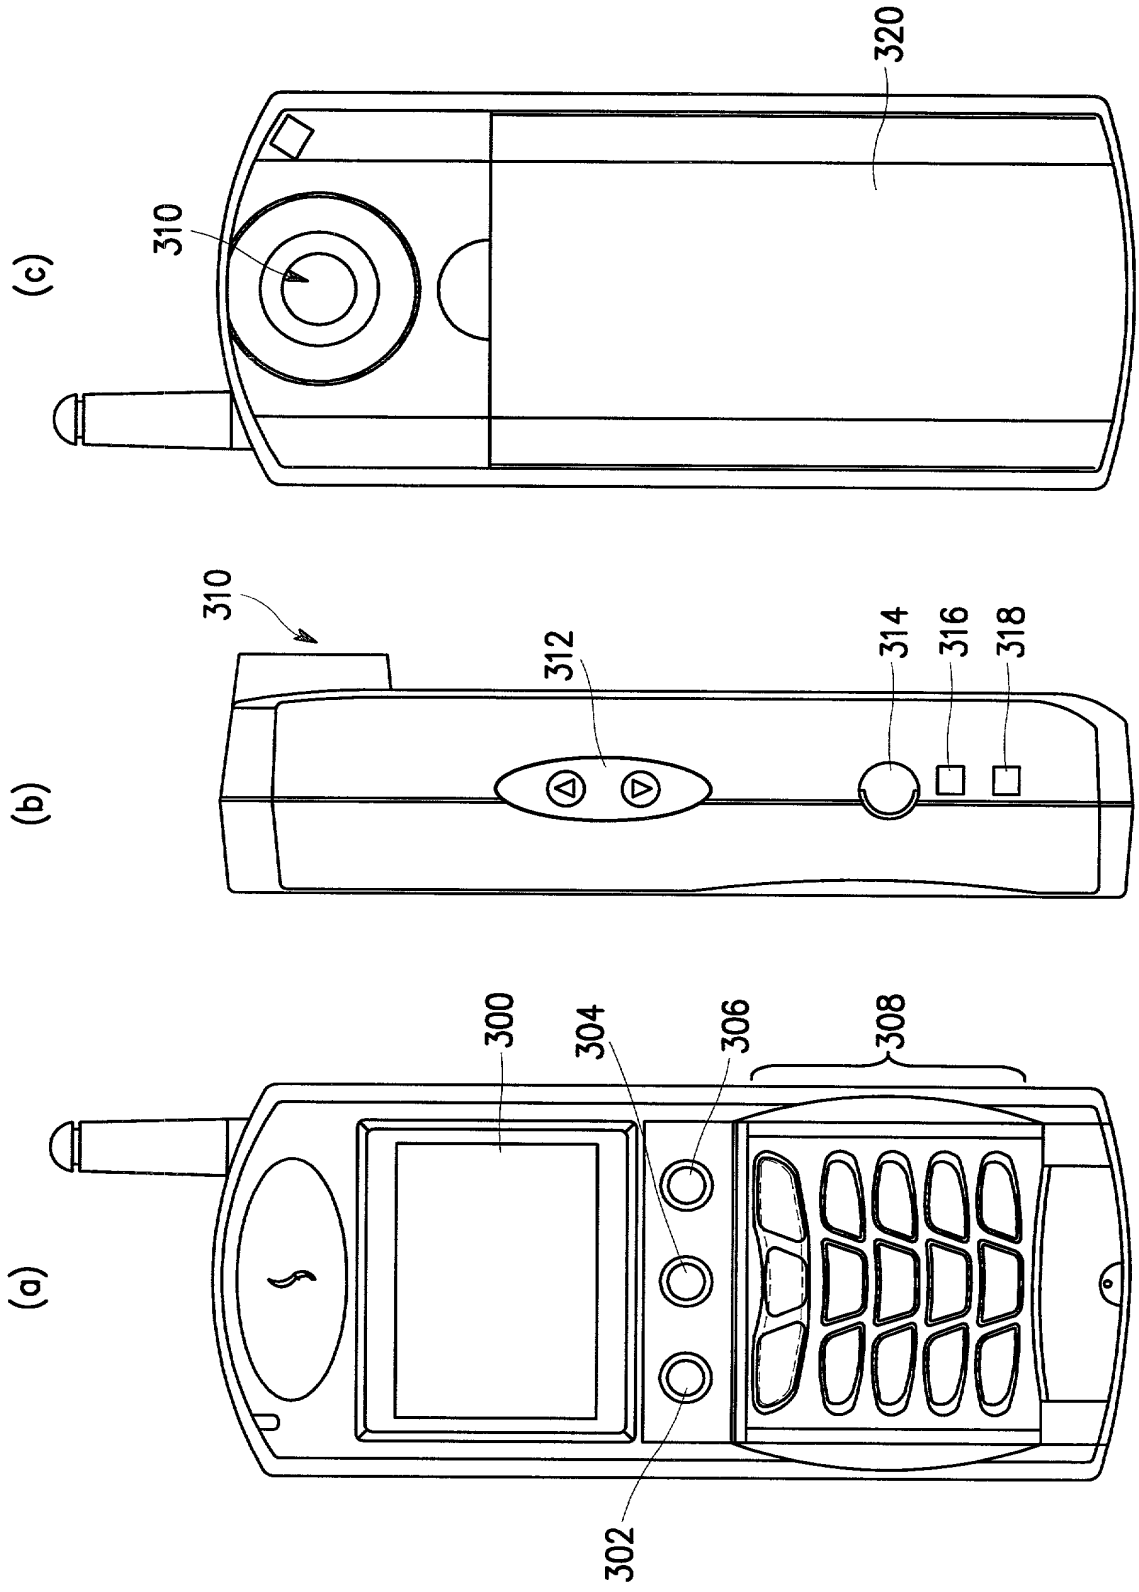


FIG. 2

FIG. 3



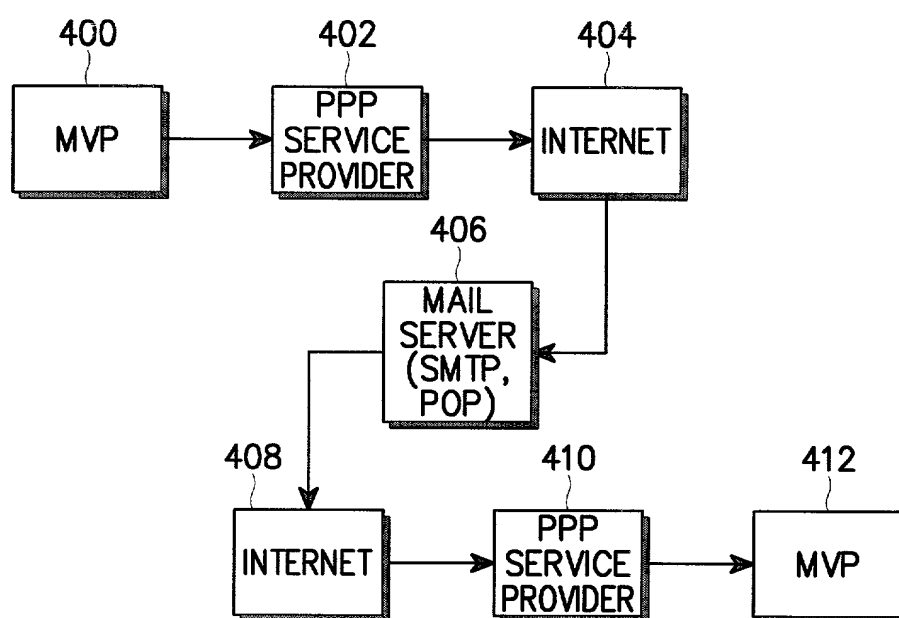


FIG. 4

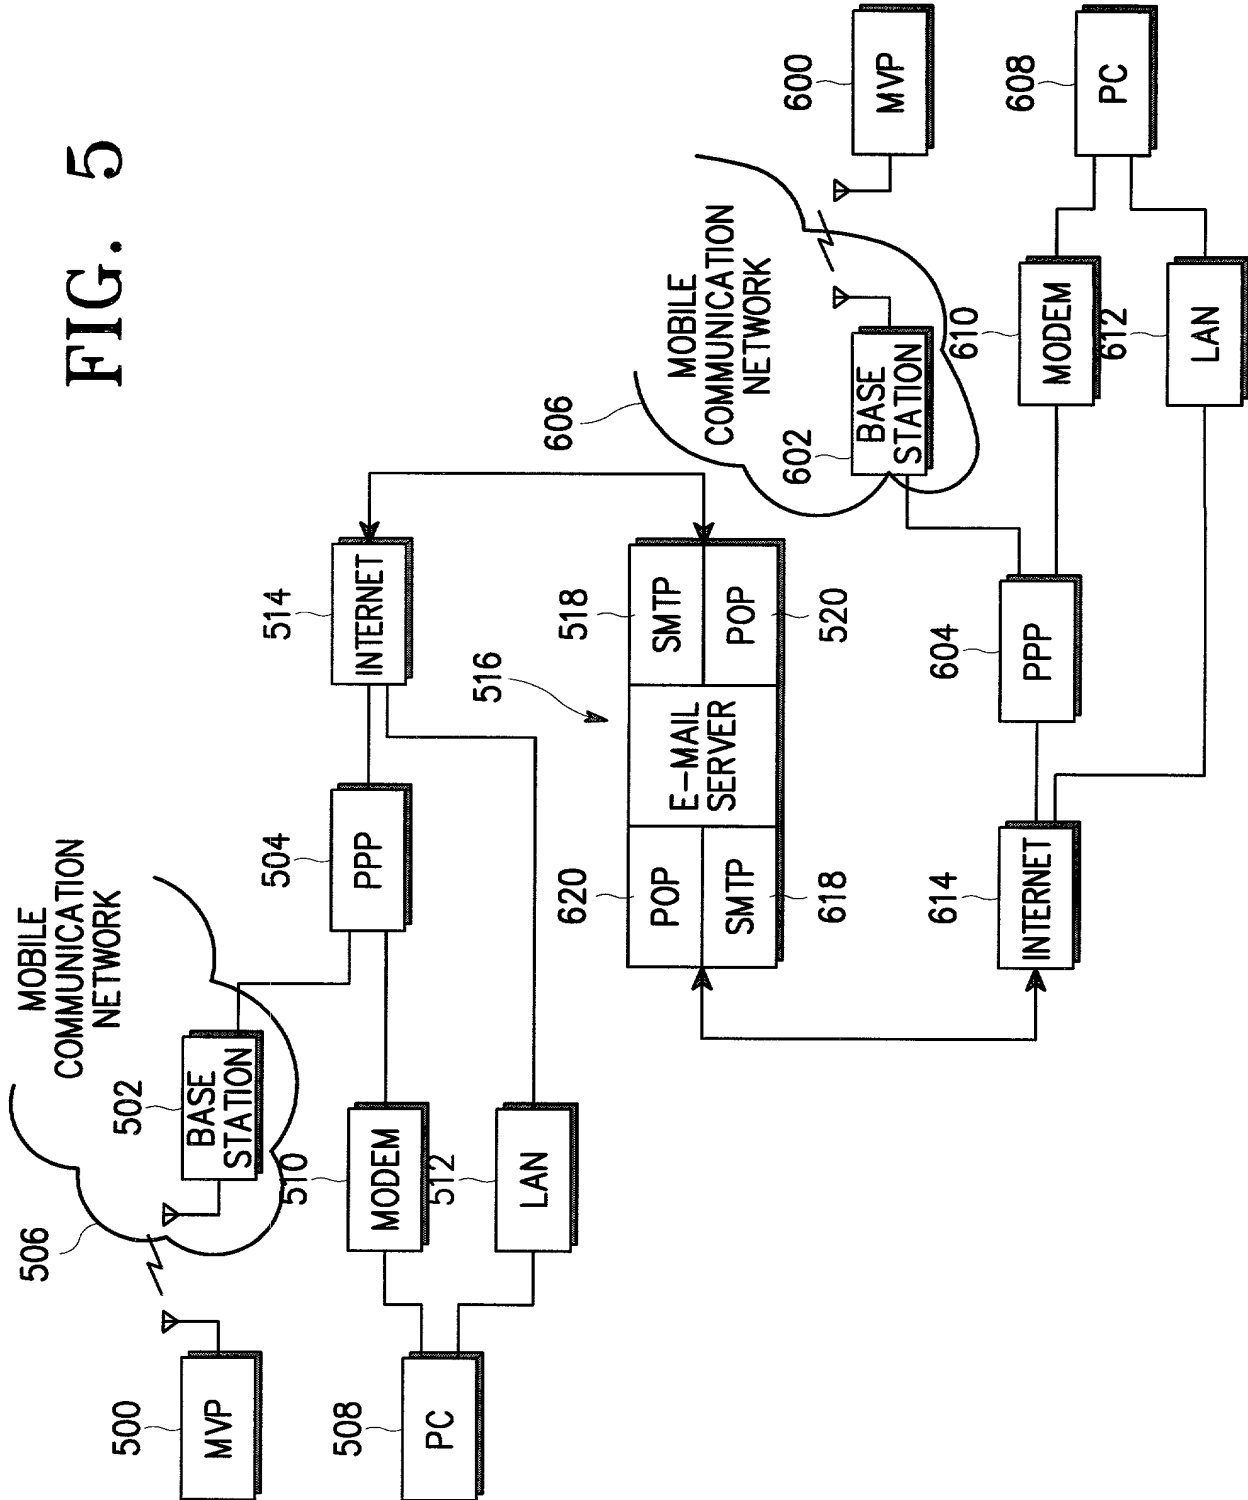
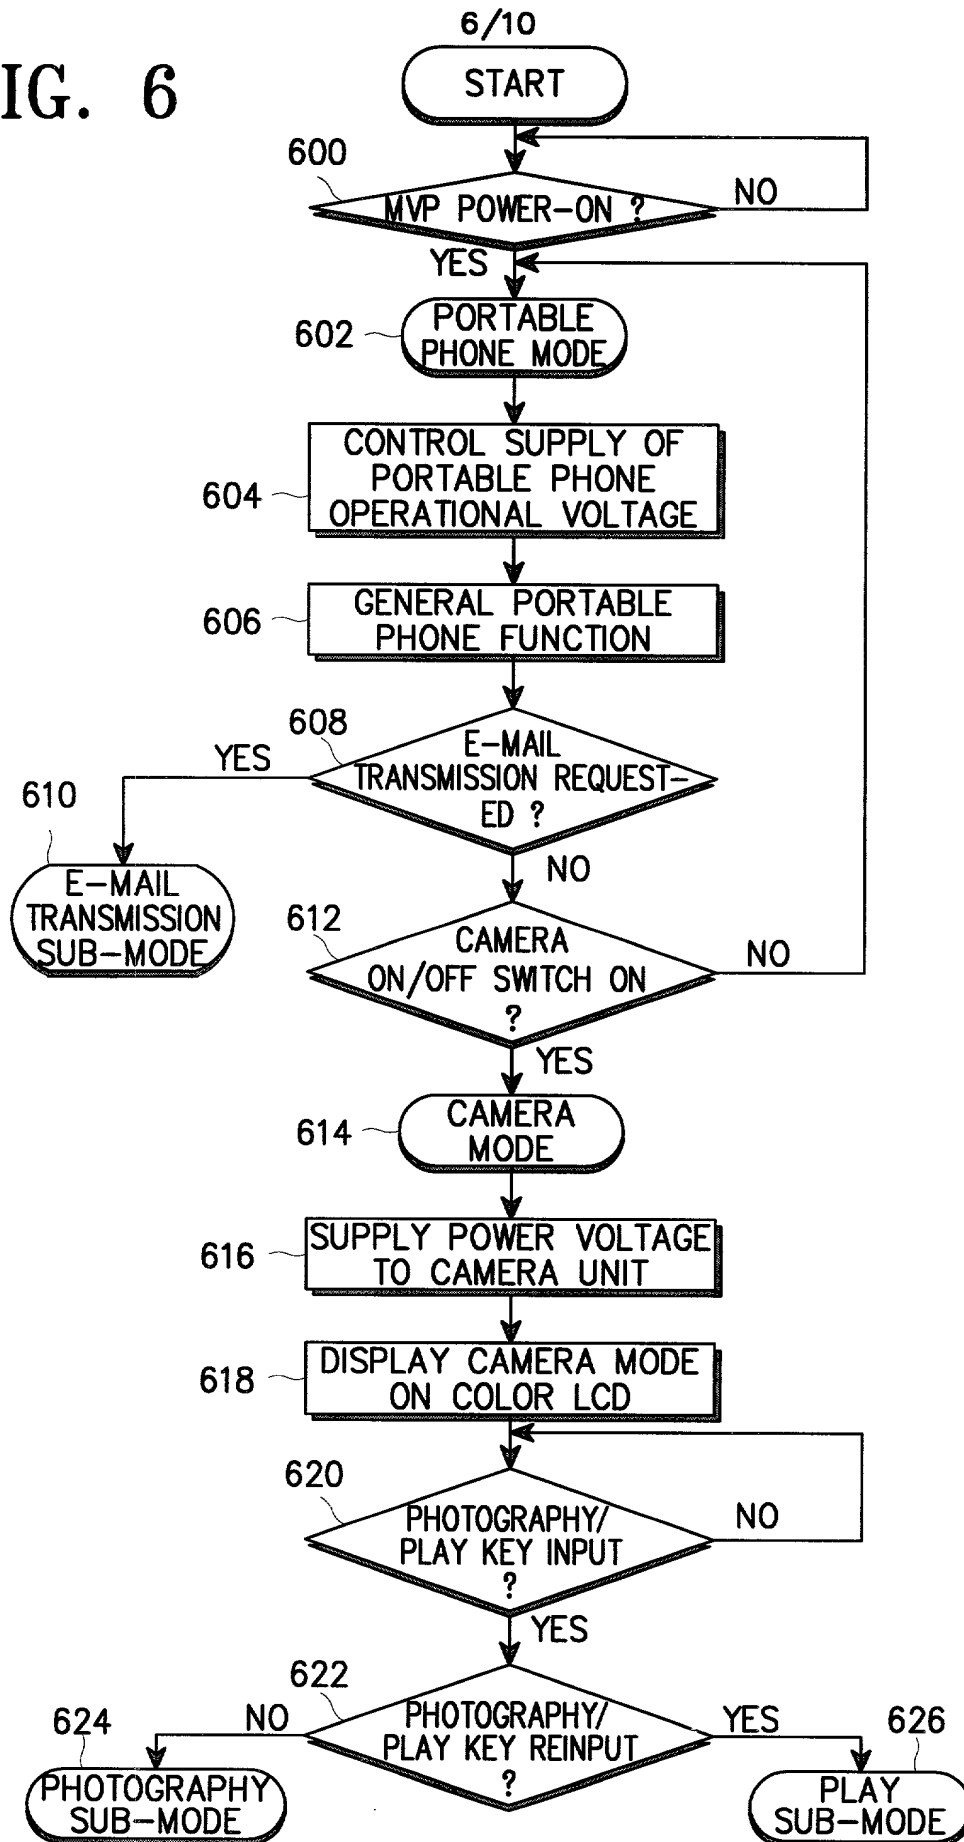


FIG. 6



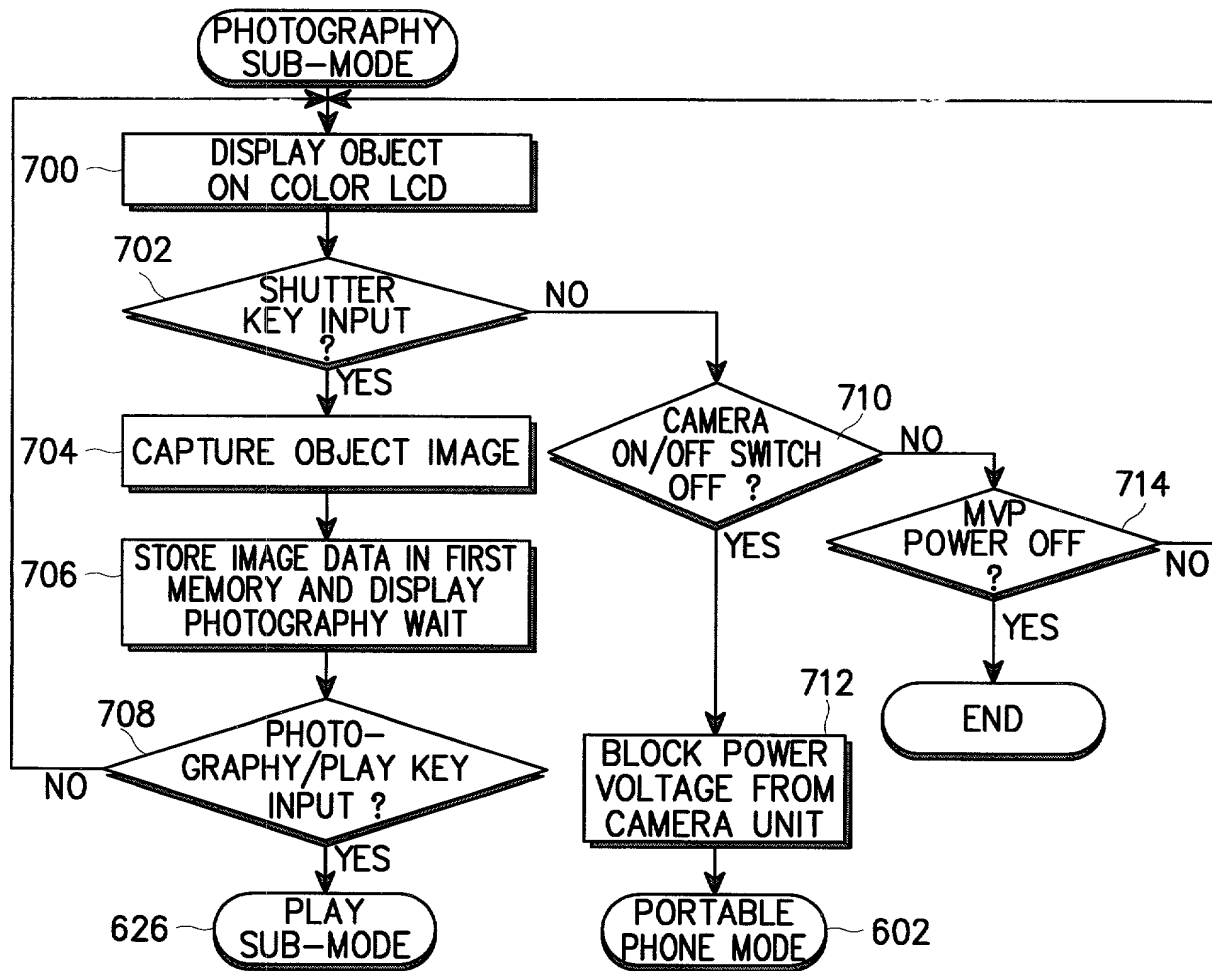


FIG. 7

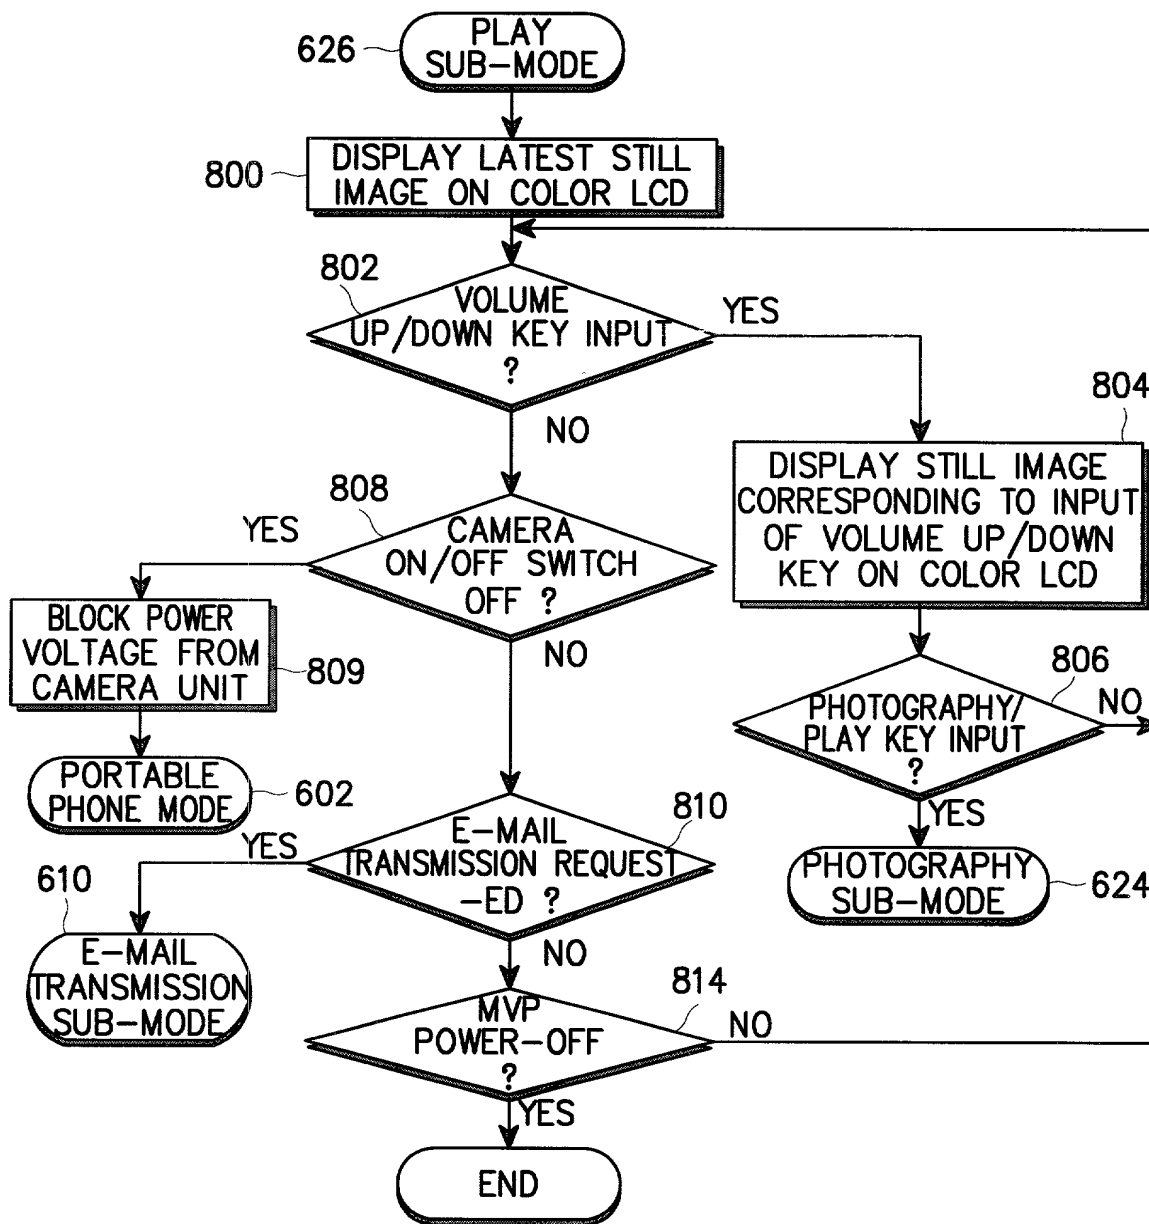


FIG. 8

FIG. 9


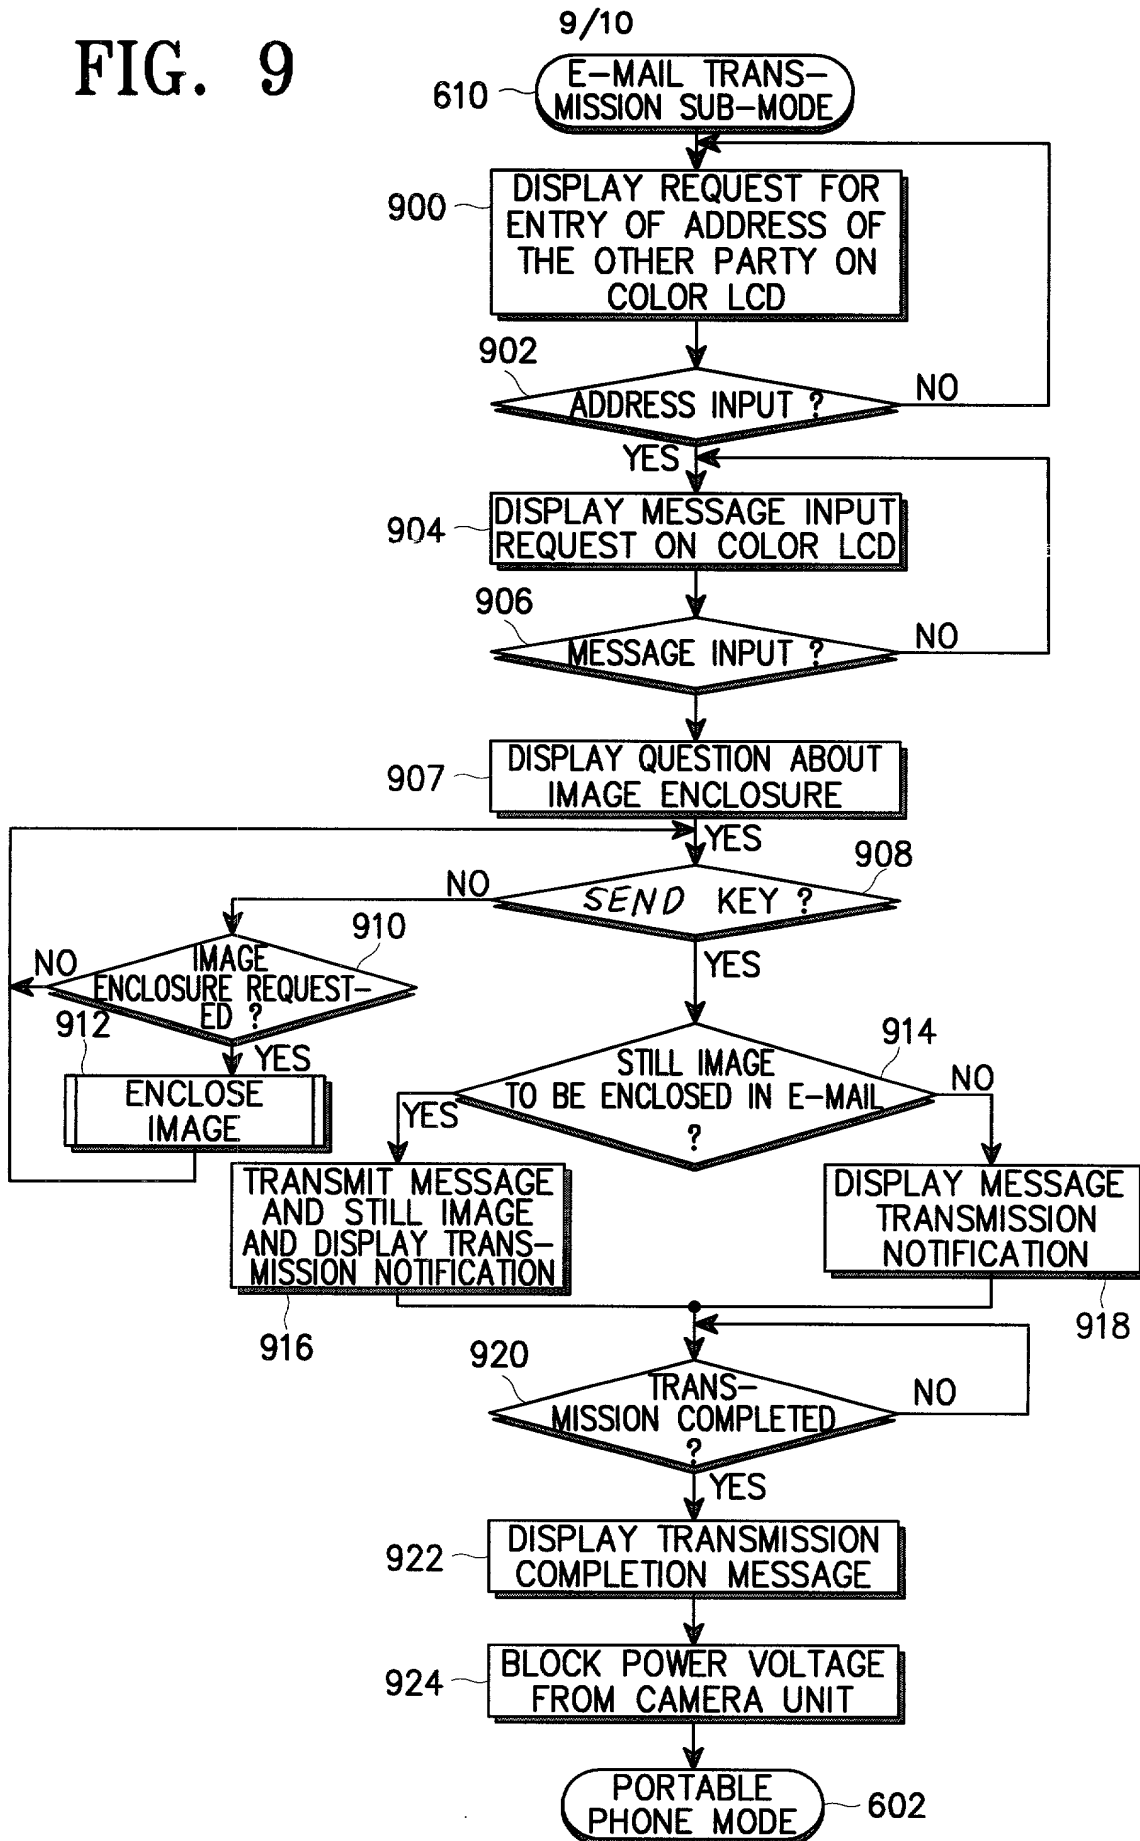


FIG. 10

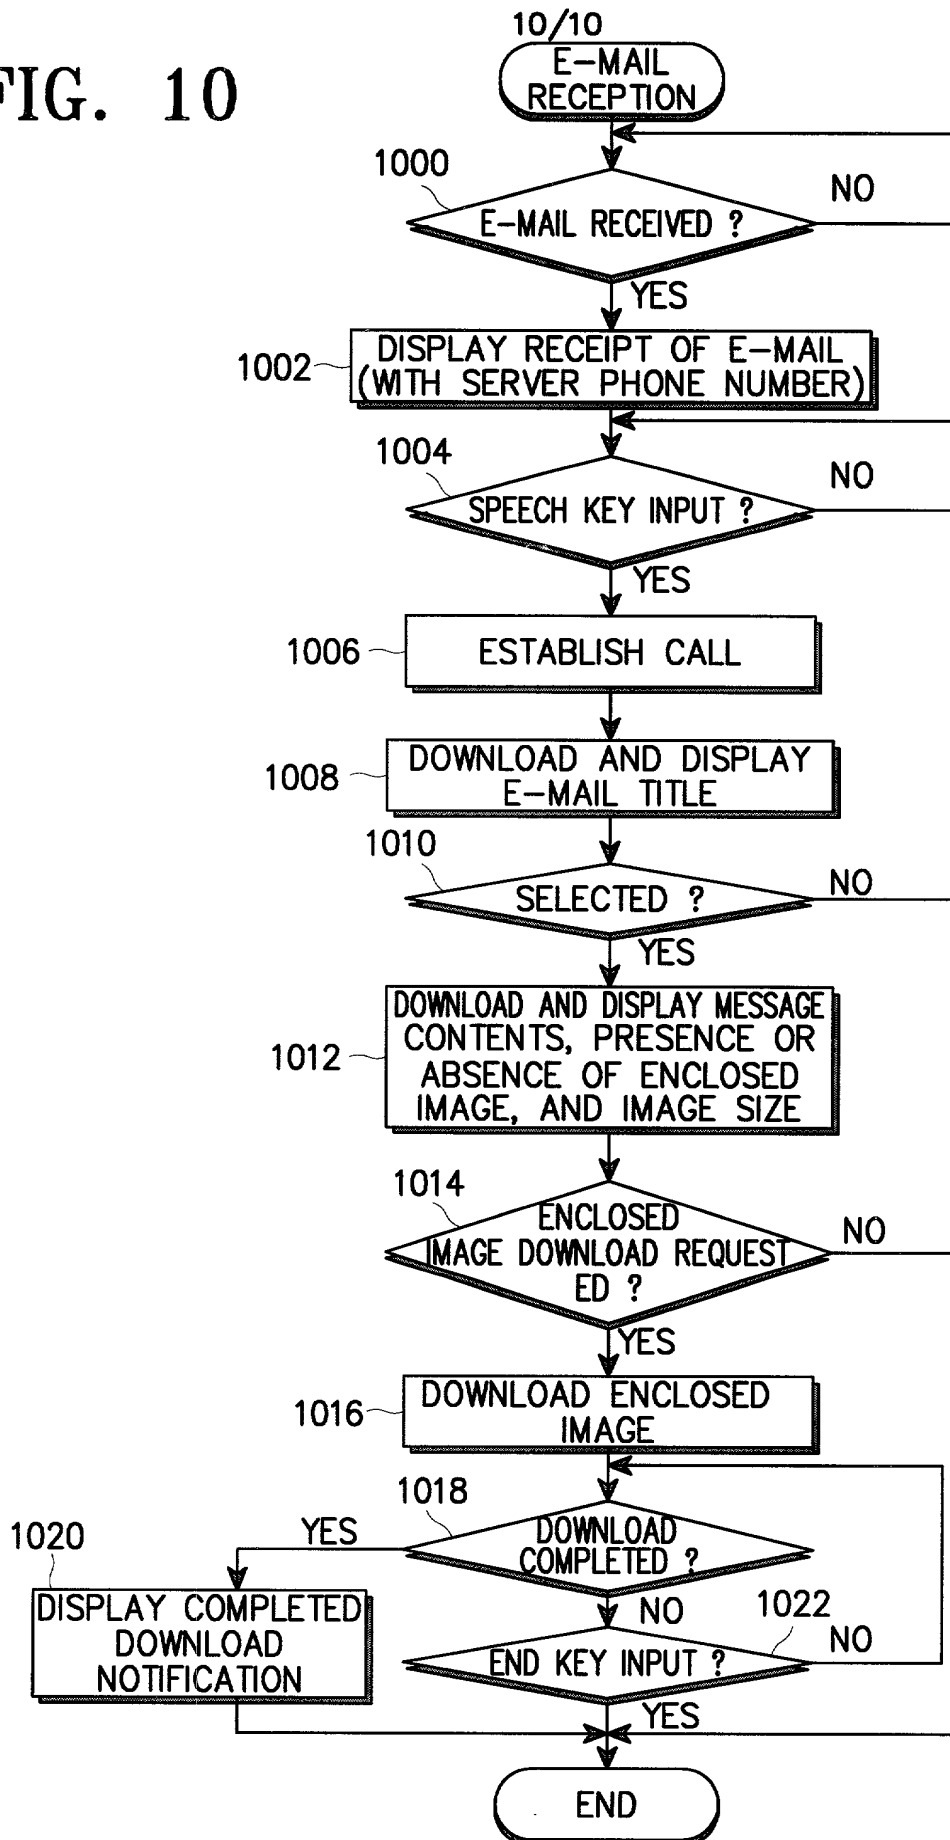

PTO/SB/01 (6/95)

DECLARATION

Docket No. 678-430 (P8851)

AS A BELOW NAMED INVENTOR, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name.

I believe that I am the original, first and sole (if only one name is listed below), or an original, first and joint inventor (if plural names are listed below), of the subject matter which is claimed and for which a patent is sought on the invention entitled:

TITLE: : PORTABLE COMPOSITE COMMUNICATION TERMINAL FOR TRANSMITTING/RECEIVING VOICE AND IMAGES, AND OPERATION METHOD AND COMMUNICATION SYSTEM THEREOF

the specification of which either is attached hereto or indicates an attorney docket no. 678-430 (P8851), or:

[] was filed in the U.S. Patent & Trademark Office on _____ and assigned Serial No. _____.

[] and (if applicable) was amended on _____.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability and to the examination of this application in accordance with Title 37 of the Code of Federal Regulations §1.56. I hereby claim foreign priority benefits under Title 35, U.S. Code §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designated at least one country other than the United States, or §119(e) of any United States provisional application(s), listed below and have also identified below any foreign applications for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>1999-11179</u>	<u>Korea</u>	<u>31/3/1999</u>	Priority Claimed:
(Application Number)	(Country)	(Day/Month/Year filed)	Yes [X] No []
_____	_____	_____	Yes [] No []
(Application Number)	(Country)	(Day/Month/Year filed)	

I hereby claim the benefit under Title 35, U.S. Code, §120, of any United States application(s), or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application(s) in the manner provided by the first paragraph of Title 35, U.S. Code, §112, I acknowledge the duty to disclose information material to patentability as defined in Title 37, The Code of Federal Regulations, §1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

_____	_____	_____
(Application Serial Number)	(Filing Date)	(STATUS: patented, pending, abandoned)

_____	_____	_____
(Application Serial Number)	(Filing Date)	(STATUS: patented, pending, abandoned)

I hereby appoint the following attorneys: PETER G. DILWORTH, Reg. No. 26,450; ROCCO S. BARRESE, Reg. No. 25,253; DAVID M. CARTER, Reg. No. 30,949; PAUL J. FARRELL, Reg. No. 33,494; PETER DELUCA, Reg. No. 32,978; JEFFREY S. STEEN, Reg. No. 32,063; ADRIAN T. CALDERONE, Reg. No. 31,746; GEORGE M. KAPLAN, Reg. No. 28,375; JOSEPH W. SCHMIDT, Reg. No. 36,920; RAYMOND E. FARRELL, Reg. No. 34,816; RUSSELL R. KASSNER, Reg. No. 35,183; CHRISTOPHER G. TRAINOR, Reg. No. 39,517; GEORGE LIKOUREZOS, Reg. No. 40,087; JAMES M. LOEFFLER, Reg. No. 37,873; EDWARD C. MEAGHER, Reg. No. 41,189; SUSAN L. HESS, Reg. No. 37,350; MICHAEL P. DILWORTH, Reg. No. 37,311; PETER B. SORELL, Reg. No. 44,349, and GLENN D. SMITH, Reg. No. 42,156, each of them of DILWORTH & BARRESE, 333 Earle Ovington Boulevard, Uniondale, New York 11553 to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith and with any divisional, continuation, continuation-in-part, reissue or re-examination application, with full power of appointment and with full power to substitute an associate attorney or agent, and to receive all patents which may issue thereon, and request that all correspondence be addressed to:

Paul J. Farrell, Esq.
DILWORTH & BARRESE
333 Earle Ovington Boulevard
Unlondale, New York 11553
Tel. No.: (516) 228-8484

I HEREBY DECLARE that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under §1001 of Title 18 U.S. Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF FIRST OR SOLE INVENTOR: Jae-Min KIM Citizenship Korea

Inventor's signature: Jae-Min Kim Date: March 30, 2000
Residence & Post Office Address: Shinnamushil Jukong APT. #604-1104, Youngtong-dong, Paltal-gu, Suwon-shi, Kyonggi-do, Korea

FULL NAME OF SECOND JOINT INVENTOR: Jeong-Seok OH Citizenship Korea

Inventor's signature: Jeong-Seok Oh Date: March 30, 2000
Residence & Post Office Address: San 14-1, Nongseo-ri, Kihung-up, Yong-in-shi, Kyonggi-do, Korea

FULL NAME OF THIRD JOINT INVENTOR: Sang-Ryul PARK Citizenship Korea

Inventor's signature: Sang-Ryul Park Date: March 30, 2000
Residence & Post Office Address: 1833-15, Taemyong 2-dong, Nam-gu, Taegu-Kwangyokshi, Korea

FULL NAME OF FOURTH JOINT INVENTOR: _____ Citizenship _____

Inventor's signature: _____ Date: _____
Residence & Post Office Address: _____

FULL NAME OF FIFTH JOINT INVENTOR: _____ Citizenship _____

Inventor's signature: _____ Date: _____
Residence & Post Office Address: _____

FULL NAME OF SIXTH JOINT INVENTOR: _____ Citizenship _____

Inventor's signature: _____ Date: _____
Residence & Post Office Address: _____